

ZINC UNO / WASHER

SURFACE MOUNTED

Zinc is designed to contrast with the existing blocky floodlights and spotlights. The Uno showcases a compact high-performance tool that can host a multitude of optics which allows this product to be used in all kinds of Architectural and urban applications.

Zinc line leaves minimal physical impact while blending smoothly within its environment. In spite the compact design Zinc luminaires can host different optics to serve different lighting situations.

This product can be mounted vertically or horizontally and has a tilt adjustment up to 90°, allowing designers to illuminate horizontal, sloped, and vertical surfaces alike.

Product Features:

- Homogeneous color mixing within one reflector
- IP 65
- Different optics serving different lighting application:
 - Wall washer
 - Wall grazer
 - Flood light



Luminaire

Application:	Washer
Body Material:	Extruded aluminium
Glass Cover:	Black Serigraphy

Installation

Operating Temperature: -10 to 50°C


Optics

Optic Type: Metallized Faceted Reflectors


Electrical equipment

Mains Voltage:	220-240 VAC 50/60 Hz
Control Gear Efficacy:	> 85%

Polar Curves



Cut-Off Washer LOR: 73%

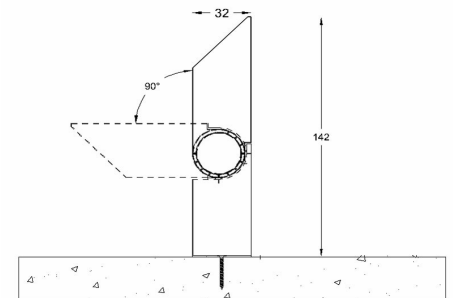


We reserve the right to make technical chan

ZINC / WASHER

SURFACE MOUNTED

Mounting Ratio



Setback from the wall is defined by wall texture and height. Consult our sales representative for optimal setback according to your project conditions.

We reserve the right to make technical changes without prior notice

ZINC / WASHER

SURFACE MOUNTED

Code Index:

<u>Z 3</u>	<u>U</u>	<u>O S M</u>	<u>W O</u>	<u>X X</u>	-----	-	<u>6 5</u>	--	<u>0 8</u>	---
Family	Product	Mounting	Optic	Light Distribution	CRI/CCT & Power	Control	IP	Body Finish	Length	Wiring
					927M1	C		BS		BI
					927M2	K		WS		HI
					930M1	L		GS		
					930M2					
					940M1					
					940M2					

Family Z3 Zinc	Product U Uno	Mounting OSM Surface Mounted	Optic WO Cut-off Washer	Light Distribution XX N/A
------------------------------------	--------------------------------	---	--	--

CRI/CCT & Power	Control	IP	Body Finish
<div>LED Load initial Lumen</div> <div>2700°K 927M1: 4.2 W 350 lm 927M2: 6 W 460 lm</div> <div>3000°K 930M1: 4.2 W 370 lm 930M2: 6 W 500 lm</div> <div>4000°K 940M1: 4.2 W 400 lm 940M2: 6 W 530 lm</div>	C Non-dimmable K DALI Dimmable L 1-10V Dimmable	65 IP65	BS Black Smooth WS White Smooth GS Gray Smooth

Length 08 8 cm	Wiring BI Back feeding HI Hidden feeding
---------------------------------	---

We reserve the right to make technical changes without prior notice

