

# LIGHTWAY 5 – OUTDOOR / FLOODLIGHT BEAM ADJUSTABLE BRACKET

The Lightway 5 Outdoor beam is developed for maximum performance in harsh environmental conditions. Made from extruded aluminum, this IP66 element benefits from a wide variety of outputs. The Beam compatible with a wide array of beam angles, generating a powerful overall lighting effect.

The fixture is available with an aluminum anti glare shield that gives control over the light for increased visual comfort.

- Diverse options of beam angles: very narrow, narrow, medium, wide and elliptic
- Delivers High levels of light
- Integrates with any architecture.



## Luminaire

**Application:** Floodlight  
**Body Material:** Extruded aluminium

## Installation



**Operating Temperature:** -10 to 50°C

## Optics



**Optic Type:** UV stabilized TIR Lens

## Electrical equipment


**Mains Voltage:** 220–240 VAC 50/60 Hz  
**Control Gear Efficacy:** > 85%

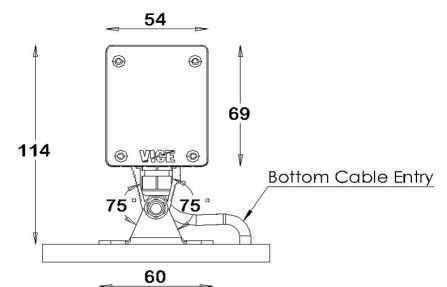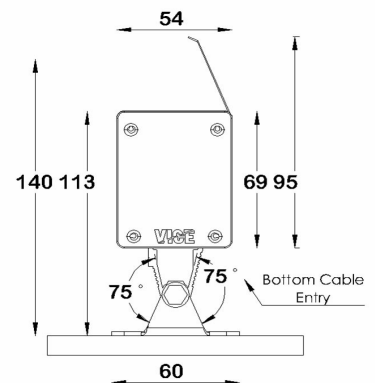


# LIGHTWAY 5 – OUTDOOR / FLOODLIGHT BEAM ADJUSTABLE BRACKET

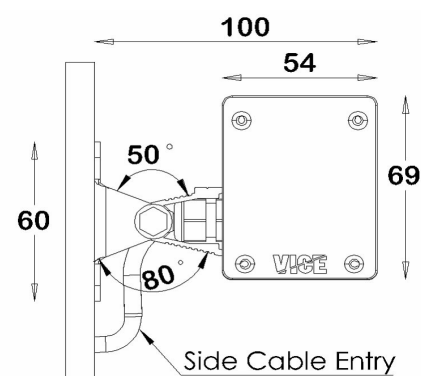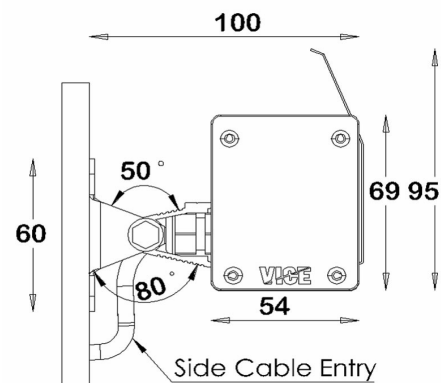


## Polar Curves

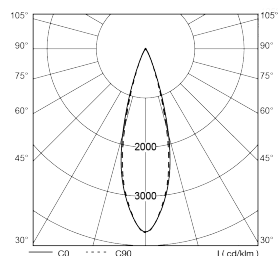


Beam Angle 30° LOR: 79.5%



Beam Angle 30° with Shield  
LOR: 64.2%



Beam Angle 45° LOR: 70.5%



Beam Angle 45° with Shield  
LOR: 50.1%

We reserve the right to make technical changes without prior notice

**VICE**

# LIGHTWAY 5 – OUTDOOR / FLOODLIGHT BEAM

## ADJUSTABLE BRACKET

### Code Index:

| L 5    | O           | S 1      |               | A T       |       |                    |                 |         | 6 6 |             |        |         |        |
|--------|-------------|----------|---------------|-----------|-------|--------------------|-----------------|---------|-----|-------------|--------|---------|--------|
| Family | Environment | Mounting | Glare Control | Accessory | Optic | Light Distribution | CRI/CCT & Power | Control | IP  | Body Finish | Length | Feeding | Wiring |
|        |             |          | X             |           |       | 30                 | 927P1           | C       |     | GS          | 30     | B       | I      |
|        |             |          | S             |           |       | 45                 | 927P2           | D       |     | B           | 60     | S       | B      |
|        |             |          |               |           |       |                    | 927P3           | E       |     | W           | 90     |         | M      |
|        |             |          |               |           |       |                    | 930P1           |         |     | G           | 120    |         | E      |
|        |             |          |               |           |       |                    | 930P2           |         |     |             |        |         |        |
|        |             |          |               |           |       |                    | 930P3           |         |     |             |        |         |        |
|        |             |          |               |           |       |                    | 940P1           |         |     |             |        |         |        |
|        |             |          |               |           |       |                    | 940P2           |         |     |             |        |         |        |
|        |             |          |               |           |       |                    | 940P3           |         |     |             |        |         |        |
|        |             |          |               |           |       |                    | 9TW             |         |     |             |        |         |        |

|                                |                                 |                                          |                                                                               |                         |
|--------------------------------|---------------------------------|------------------------------------------|-------------------------------------------------------------------------------|-------------------------|
| <b>Family</b><br>L5 Lightway 5 | <b>Environment</b><br>O Outdoor | <b>Mounting</b><br>S1 Adjustable Bracket | <b>Glare Control</b><br><b>Accessory</b><br>X N/A<br>S With Anti-Glare Shield | <b>Optic</b><br>AT Beam |
|--------------------------------|---------------------------------|------------------------------------------|-------------------------------------------------------------------------------|-------------------------|

|                                                                                     |                            |               |          |                |                         |                |
|-------------------------------------------------------------------------------------|----------------------------|---------------|----------|----------------|-------------------------|----------------|
| <b>Light Distribution</b><br><b>30</b> Medium Beam, 30°<br><b>45</b> Wide Beam, 45° | <b>CRI/CCT &amp; Power</b> |               |          | <b>Control</b> | <b>IP</b>               |                |
|                                                                                     |                            |               | LED Load | initial Lumen  | <b>C</b> Non-dimmable   | <b>66</b> IP66 |
|                                                                                     | <b>2700°K</b>              | <b>927P1:</b> | 20 W/m   | 1700 lm/m      | <b>D</b> DALI Dimmable  |                |
|                                                                                     |                            | <b>927P2:</b> | 30 W/m   | 2250 lm/m      | <b>D</b> DALI Type 8    |                |
|                                                                                     |                            | <b>927P3:</b> | 42 W/m   | 3000 lm/m      | <b>E</b> 1-10V Dimmable |                |
|                                                                                     | <b>3000°K</b>              | <b>930P1:</b> | 20 W/m   | 1700 lm/m      |                         |                |
|                                                                                     |                            | <b>930P2:</b> | 30 W/m   | 2400 lm/m      |                         |                |
|                                                                                     |                            | <b>930P3:</b> | 42 W/m   | 3100 lm/m      |                         |                |
|                                                                                     | <b>4000°K</b>              | <b>940P1:</b> | 20 W/m   | 1900 lm/m      |                         |                |
|                                                                                     |                            | <b>940P2:</b> | 30 W/m   | 2550 lm/m      |                         |                |
|                                                                                     |                            | <b>940P3:</b> | 42 W/m   | 3300 lm/m      |                         |                |
|                                                                                     | <b>Tunable White</b>       | <b>9TWP1:</b> | 20 W/m   | 2560 lm/m      |                         |                |
|                                                                                     |                            | <b>9TWP2:</b> | 30 W/m   | 3650 lm/m      |                         |                |
|                                                                                     |                            | <b>9TWP3:</b> | 42 W/m   | 4730 lm/m      |                         |                |

|                                                                      |                                                                 |                                      |                                                                   |
|----------------------------------------------------------------------|-----------------------------------------------------------------|--------------------------------------|-------------------------------------------------------------------|
| <b>Body Finish</b><br>GS Gray Smooth<br>B Black<br>W White<br>G Gray | <b>Length</b><br>30 30 cm<br>60 60 cm<br>90 90 cm<br>120 120 cm | <b>Feeding</b><br>B Bottom<br>S Side | <b>Wiring</b><br>I Individual<br>B Beginning<br>M Middle<br>E End |
|----------------------------------------------------------------------|-----------------------------------------------------------------|--------------------------------------|-------------------------------------------------------------------|

We reserve the right to make technical changes without prior notice

