

E-FRAMER TRIO / WASHER

SURFACE MOUNTED

e-Framer is designed to contrast with the existing blocky floodlights and spotlights. The showcases are a compact high-performance tool that can host a multitude of optics which allows this product to be used in all kinds of Architectural and urban applications.

e-Framer product blend smoothly within its environment. In spite the compact design of e-Framer can host different optics to serve different lighting situations.

This product can be mounted vertically or horizontally allowing designers to illuminate horizontal, sloped, and vertical surfaces alike.

Product Features:

- Homogeneous color mixing within one reflector
- IP 66
- Different optics serving different type of light distribution



Luminaire

Application: Washer
Body Material: Extruded aluminium

Installation

Operating Temperature: -10 to 50°C


Optics

Optic Type: Metallized Faceted Reflectors


Electrical equipment

Mains Voltage: 220-240 VAC 50/60 Hz


Control Gear Efficacy: > 85%

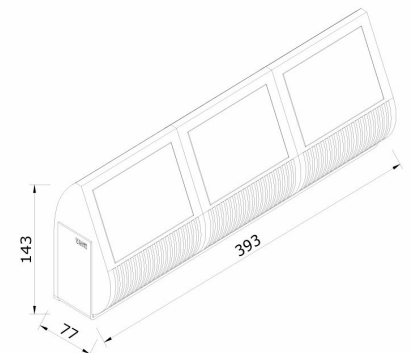


Polar Curves



High Distribution LOR: 67%



Wide Distribution LOR: 67%



Square Distribution LOR: 67%

We reserve the right to make technical changes without prior notice

E-FRAMER / WASHER SURFACE MOUNTED

Code Index:

| <u>E F</u> | <u>T</u> | <u>O S M</u> | <u>W S</u> | -- | ----- | — | <u>6 6</u> | — |
|------------|----------|--------------|------------|--------------------|-----------------|---------|------------|-------------|
| Family | Product | Mounting | Optic | Light Distribution | CRI/CCT & Power | Control | IP | Body Finish |
| | | | | HD | 827A1 | C | | B |
| | | | | SD | 827A2 | D | | W |
| | | | | WD | 827A3 | E | | G |
| | | | | | 830A1 | | | |
| | | | | | 830A2 | | | |
| | | | | | 830A3 | | | |
| | | | | | 840A1 | | | |
| | | | | | 840A2 | | | |
| | | | | | 840A3 | | | |

| Family | Product | Mounting | Optic | Light Distribution |
|-------------|---------|---------------------|-----------|--|
| EF e-Framer | T Trio | OSM Surface Mounted | WS Washer | HD High Distribution SD Square Distribution WD Wide Distribution |

| CRI/CCT & Power | | | | Control | IP | Body Finish |
|-----------------|---------------|----------|---------------|-------------------------|----------------|----------------|
| | | LED Load | initial Lumen | | | |
| 80-2700 | 827A1: | 36 W | 4180 lm | C Non-dimmable | 66 IP66 | B Black |
| | 827A2: | 54 W | 5100 lm | D DALI Dimmable | | W White |
| 80-3000 | 830A1: | 36 W | 4350 lm | E 1-10V Dimmable | | G Gray |
| | 830A2: | 54 W | 5310 lm | | | |
| 80-4000 | 840A1: | 36 W | 4570 lm | | | |
| | 840A2: | 54 W | 5580 lm | | | |

We reserve the right to make technical changes without prior notice