

ZINC RAY / WASHER

SURFACE MOUNTED

Zinc is designed to contrast with the existing blocky linear floodlights and spotlights. Where developers are trying to hide fixtures using additional architectural details to reduce their visual impact, it is time to display a performance tool without being apologetic. Zinc offers a high performance outdoor fixture with pleasing aesthetics and unobtrusive form.

Zinc line leaves minimal physical impact while blending smoothly within its environment. In spite the compact design Zinc luminaires can host different optics to serve different lighting situations.

This product can be mounted vertically or horizontally and has a tilt adjustment up to 90°, allowing designers to illuminate horizontal, sloped, and vertical surfaces alike.

Product Features:

- Homogeneous color mixing within one reflector
- Uniformity of 1:4
- IP 65
- Different optics serving different lighting application:
 - ◊ Wall washer
 - ◊ Wall grazer
 - ◊ Flood light



Luminaire

Application:	Washer
Body Material:	Extruded aluminium
Glass Cover:	Black Serigraphy

Installation

Operating Temperature: -10 to 50°C


Optics

Optic Type: Metallized Faceted Reflectors

Electrical equipment


Mains Voltage:	220-240 VAC 50/60 Hz
Control Gear Efficacy:	> 85%

Polar Curves

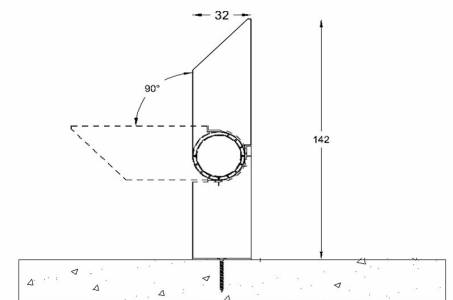


We reserve the right to r.

ZINC / WASHER SURFACE MOUNTED



Cut-Off Washer LOR: 73%

Mounting Ratio



Height/6 to Height/5

Setback from the wall is defined by wall texture and height. Consult our sales representative for optimal setback according to your project conditions.

We reserve the right to make technical changes without prior notice

ZINC / WASHER

SURFACE MOUNTED

Code Index:

<u>Z 3</u>	<u>R</u>	<u>O S M</u>	<u>W O</u>	<u>X X</u>	-----	-	<u>6 5</u>	--	---	--
Family	Product	Mounting	Optic	Light Distribution	CRI/CCT & Power	Control	IP	Body Finish	Length	Wiring
					927M1	C		BS	30	BB
					927M2	D		WS	60	BI
					927M3	E		GS	90	HB
					930M1				120	HI
					930M2					M
					930M3					E
					940M1					
					940M2					
					940M3					

Family
Z3
Zinc

Product
R Ray

Mounting
OSM Surface Mounted

Optic
WO Cut-off Washer

Light Distribution
XX N/A

CRI/CCT & Power			Control		IP	Body Finish	
		LED Load initial Lumen	C Non-dimmable		65 IP65	BS Black Smooth	
2700°K	927M1:	28 W/m 2250 lm/m	D DALI Dimmable			WS White Smooth	
	927M2:	40 W/m 3050 lm/m	E 1-10V Dimmable			GS Gray Smooth	
	927M3:	56 W/m 3950 lm/m					
3000°K	930M1:	28 W/m 2300 lm/m					
	930M2:	40 W/m 3150 lm/m					
	930M3:	56 W/m 4150 lm/m					
4000°K	940M1:	28 W/m 2500 lm/m					
	940M2:	40 W/m 3400 lm/m					
	940M3:	56 W/m 4450 lm/m					

Length
30 30 cm
60 60 cm
90 90 cm
120 120 cm

Wiring
BB Back feeding, Beginning
BI Back feeding, Individual
HB Hidden feeding, Beginning
HI Hidden feeding, Individual
M Middle
E End

We reserve the right to make technical changes without prior notice

