

E-FRAMER TRIO / WASHER

SURFACE MOUNTED

e-Framer is designed to contrast with the existing blocky floodlights and spotlights. The showcases are a compact high-performance tool that can host a multitude of optics which allows this product to be used in all kinds of Architectural and urban applications.

e-Framer product blend smoothly within its environment. In spite the compact design of e-Framer can host different optics to serve different lighting situations.

This product can be mounted vertically or horizontally allowing designers to illuminate horizontal, sloped, and vertical surfaces alike.

Product Features:

- Homogeneous color mixing within one reflector
- IP 66
- Different optics serving different type of light distribution



Luminaire

Application: Washer
Body Material: Extruded aluminium

Installation

Operating Temperature: -10 to 50°C


Optics

Optic Type: Metallized Faceted Reflectors


Electrical equipment

Mains Voltage: 220-240 VAC 50/60 Hz


Control Gear Efficacy: > 85%

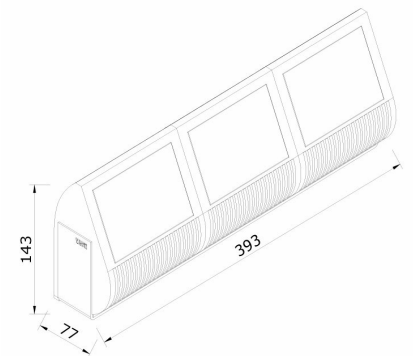


Polar Curves

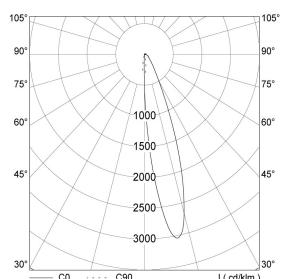

High Distribution LOR: 67%

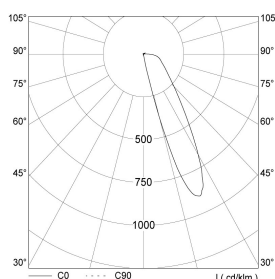

Wide Distribution LOR: 67%

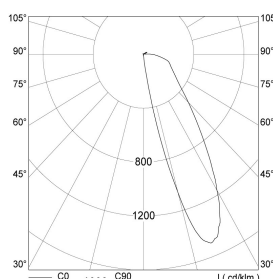

Square Distribution LOR: 67%

We reserve the right to make technical changes without prior notice

E-FRAMER / WASHER SURFACE MOUNTED

Code Index:

<u>E F</u>	<u>T</u>	<u>O S M</u>	<u>W S</u>	--	-----	-	<u>6 6</u>	-
Family	Product	Mounting	Optic	Light Distribution	CRI/CCT & Power	Control	IP	Body Finish
				HD	827A1	C		B
				SD	827A2	D		W
				WD	827A3	E		G
					830A1			
					830A2			
					830A3			
					840A1			
					840A2			
					840A3			

Family	Product	Mounting	Optic	Light Distribution
EF e-Framer	T Trio	OSM Surface Mounted	WS Washer	HD High Distribution SD Square Distribution WD Wide Distribution

CRI/CCT & Power				Control	IP	Body Finish
		LED Load	initial Lumen	C Non-dimmable	66 IP66	B Black
80-2700	827A1:	36 W	4180 lm	D DALI Dimmable		W White
	827A2:	54 W	5100 lm	E 1-10V Dimmable		G Gray
<hr/>						
80-3000	830A1:	36 W	4350 lm			
	830A2:	54 W	5310 lm			
<hr/>						
80-4000	840A1:	36 W	4570 lm			
	840A2:	54 W	5580 lm			

We reserve the right to make technical changes without prior notice